


● Absolute Maximum Ratings

| Parameter | Symbol | Limits | Unit | |
|-----------------------------|--------|------------|------|--|
| Input voltage | Vi | 170 | V | DC |
| Output voltage | Vo | 16 | Vpk | |
| Withstand voltage | BV | 1.8 | kV | 1s (between primary and secondary) |
| Maximum surface temperature | Tcmax | 105 | °C | Ambient temperature + module self-heating \leq Tcmax |
| Operating temperature range | Topr | -20 to +80 | °C | Refer to derating curve |
| Storage temperature range | Tstg | -25 to +85 | °C | |

● Dimensions (Unit : mm)

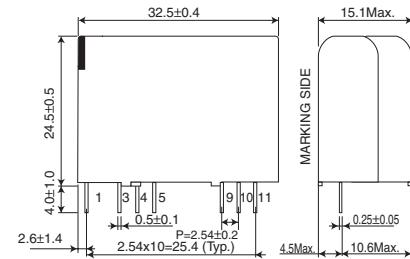


● Electrical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions |
|-----------------------------|--------|------|------|------|------|---------------------------|
| Input voltage range | Vi | 113 | 141 | 170 | V | |
| Output current | Io | 315 | 330 | 349 | mA | Vi=141V, R1=0.91Ω (1%) |
| Output voltage range | Vo | 2.5 | — | 16 | V | Vi=141V, Io=330mA |
| Output ripple voltage | Vp | — | — | 0.5 | Vp-p | Vi=141V, Io=330mA |
| Power conversion efficiency | η | 79 | 84 | — | % | Vi=141V, Vo=16V, Io=330mA |

*1 Maximum output current varies depending on ambient temperature ; please refer to derating curve.

*2 Spike noise is not included in output ripple voltage.


● Application circuit

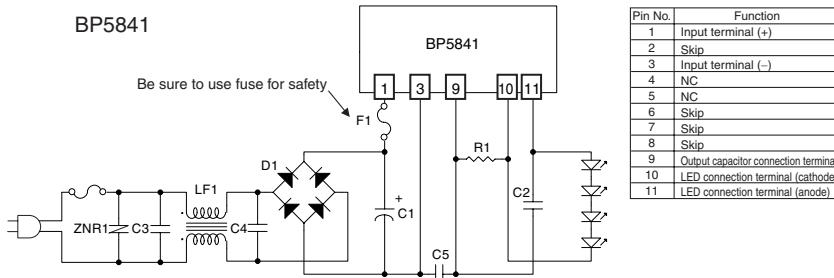


External components setting

- C1 : Input Capacitor 10μF/250V
- C2 : Output Capacitor 40μF/25V Ceramics capacitor
- R1 : Output current setting resistor $0.91\Omega \pm 1\%$ 1/4W ($Io=330mA$)
- C3, C4: Noise Removal Capacitor Please use the capacitor, if necessary.
Capacitance : 0.1μF to 0.22μF
Rated voltage : 250V or higher
- C5 : Noise Removal Capacitor 2200pF (Basic insulation)
- D1: Diode bridge 800V/1A
- F1: Fuse Fuse must be used for safety
- LF1: Line Filter 10mH
- ZNR1: Varistor Varistor must be used. It protects this part from lighting surge and static electricity.


● Derating Curve

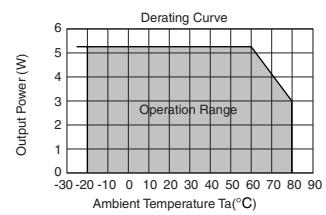

● Output Characteristics

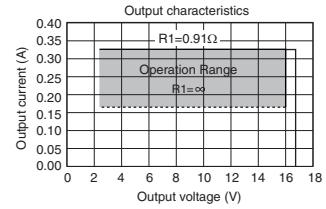

● Setting current

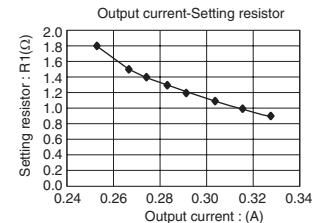

How to calculate R1
 $R1=0.13741/(0.91 \times Io - 0.151)$
 Io : Output current